
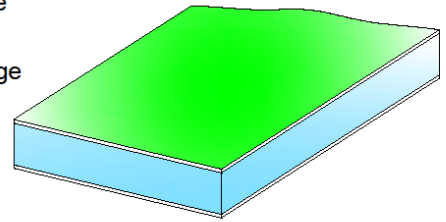
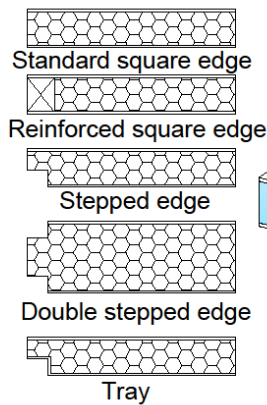


Ikon

Composite Panels

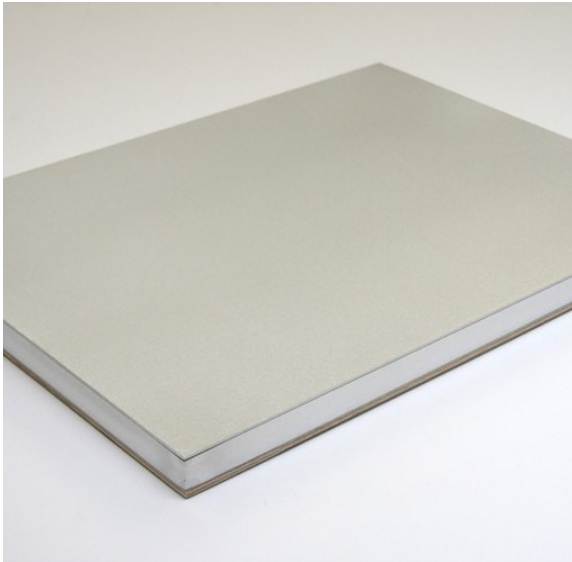

Product description

Options

Insulated sandwich panels, comprising two skins of aluminium and Styrofoam insulation

Optional foil tape to edges

Various thicknesses of insulation are available to suit individual U value requirements

Rigid Phenolic insulation can be used to decrease U value and increase fire rating

Suitable for use as cladding or for glazing into windows and doors

Tray panels can be provided

Various cut outs can be incorporated as required.

Standard RAL or BS colours.

Styrofoam - Reaction to fire, Euroclass EN13501-1 Class E.

Rigid Phenolic Insulation—Reaction to fire, BS476 Part 6 and Part 7—results conform to Class O of the UK Building Regulations, Epiradiateur—M1, ASTM E84 25/50 Flame and Smoke—up to 3 inches thick, NEN 6065/6066—Klasse 1/2, DIN 4102—B1

Insulation Technical data sheets and Safety data sheets available upon request.

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk