


# Ikon



## IKL33 Demountable louvre

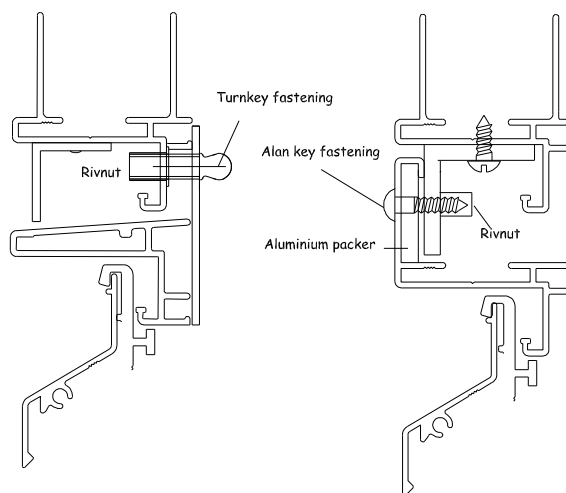

Internally demountable

Externally demountable

### Product description

Louvre panel demountable from outerframe

Blade Centre 34mm . Blade angle 60 degree.

Visual free area 59%. Physical free area 43.5%.

Can be constructed from most of the IKL33 outerframes. Flange, glaze in or rebated.

Louvre element tested to EN 13030:2002

BSRIA Test report 52719/1

Results of testing of the louvre element only shown.

### Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel

Insect mesh

Bird mesh

Single skin, or double skin insulated blanking panels

K factor 22.91

Ce 0.208

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.7	A	Face Velocity 0.5	3.43
	0.5	A	1.0	13.75
	1.0	B	1.5	30.93
	1.5	C	2.0	54.98
	2.0	D	2.5	85.91
	2.5	D	3.0	123.71

Performance: airflow, louvre with insect mesh

