






Ikon



IKL33 louvre system



IKL331

Flange frame

IKL332

Glaze in

IKL333

Rebate

IKL334

Face fix

IKL336

Structural

Product description

Blade Centre 34mm . Blade angle 60 degree.

Visual free area 59%. Physical free area 43.5%.

Frame depth 36.2mm

IKL331 Flange frame

IKL332 Glaze in frame. Options 24mm, 28mm, 32mm

IKL333 Rebate frame

IKL334 Face fix frame

IKL336 Structurally glazed frame

Tested to EN 13030:2002

BSRIA Test report 52719/1

Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel

Insect mesh

Bird mesh


Single skin, or double skin insulated blanking panels with or without plenum box.

K factor 22.91

Ce 0.208

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.7	A	Face Velocity 0.5	3.43
0.5	99.4	A	1.0	13.75
1.0	97.4	B	1.5	30.93
1.5	81.4	C	2.0	54.98
2.0	49.9	D	2.5	85.91
2.5	32.4	D	3.0	123.71

Performance: airflow, louvre with insect mesh

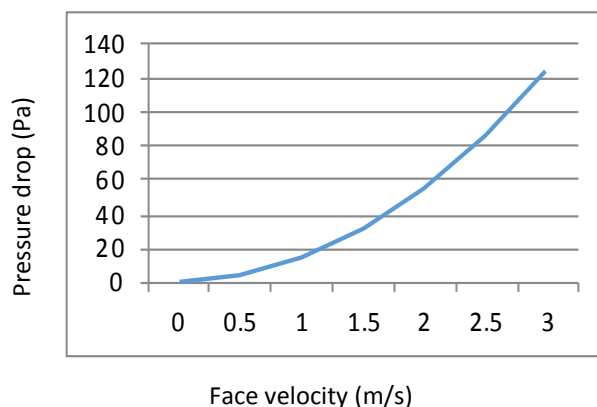

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk