


Ikon

IKL33 Panel louvre



Product description

Blade Centre 34mm . Blade angle 60 degree.

Visual free area 59%. Physical free area 43.5%.

Louvre constructed as a cassette, fitted to both sides of the panel.

Suitable for fixing to aluminium insulated or composite panels. Minimum panel depth 24mm.

Tested to EN 13030:2002

BSRIA Test report 52719/1

Options

Standard RAL or BS colours. Anodizing to special order.

Insect mesh


Bird mesh

K factor 22.91

Ce 0.208

| Watertightness | % | Class | Pressure Drop | Pd |
|----------------|------|-------|-------------------|--------|
| Velocity 0.0 | 99.7 | A | Face Velocity 0.5 | 3.43 |
| 0.5 | 99.4 | A | 1.0 | 13.75 |
| 1.0 | 97.4 | B | 1.5 | 30.93 |
| 1.5 | 81.4 | C | 2.0 | 54.98 |
| 2.0 | 49.9 | D | 2.5 | 85.91 |
| 2.5 | 32.4 | D | 3.0 | 123.71 |

Performance: airflow, louvre with insect mesh

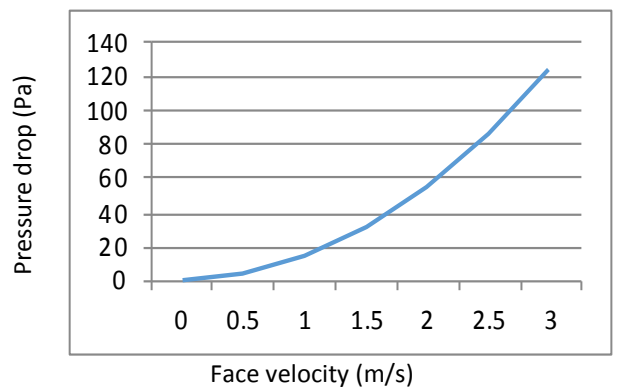

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk