


Ikon



IKL333 Rebate frame louvre

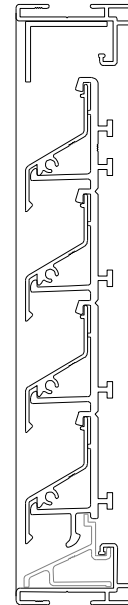

Product description

Blade Centre 34mm . Blade angle 60degree.

Visual free area 59%. Physical free area 43.5%.

Frame depth 36.2mm

Tested to EN 13030:2002

BSRIA Test report 52719/1

Can be supplied with fixing lugs if required

K factor 22.91		Ce 0.208		
Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.7	A	Face Velocity 0.5	3.43
	0.5	A	1.0	13.75
	1.0	B	1.5	30.93
	1.5	C	2.0	54.98
	2.0	D	2.5	85.91
	2.5	D	3.0	123.71

Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel


Insect mesh

Bird mesh

Single skin, or double skin insulated blanking panels

with or without plenum box.

Performance: airflow, louvre with insect mesh

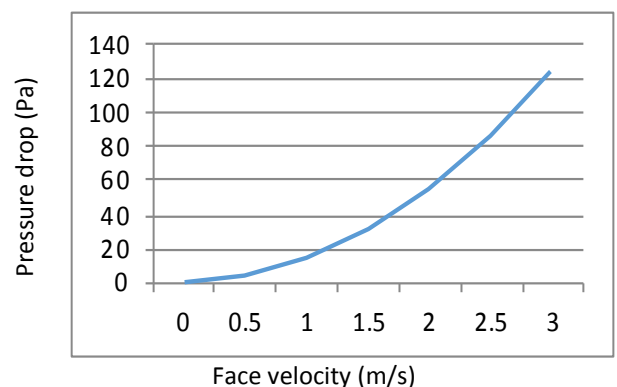

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk