


# Ikon

## IKL334 face fix louvre



### Product description


Blade Centre 34mm . Blade angle 60 degree.  
 Visual free area 59%. Physical free area 43.5%.  
 Frame depth 36.2mm  
 Tested to EN 13030:2002  
 BSRIA Test report 52719/1

K factor 22.91		Ce 0.208		
Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.7	A	Face Velocity 0.5	3.43
	0.5	A	1.0	13.75
	1.0	B	1.5	30.93
	1.5	C	2.0	54.98
	2.0	D	2.5	85.91
	2.5	D	3.0	123.71

### Options

Standard RAL or BS colours. Anodizing to special order.  
 Drainage channel  
 Insect mesh  
 Bird mesh  
 Single skin, or double skin insulated blanking panels  
 with or without plenum box.

Performance: airflow, louvre with insect mesh

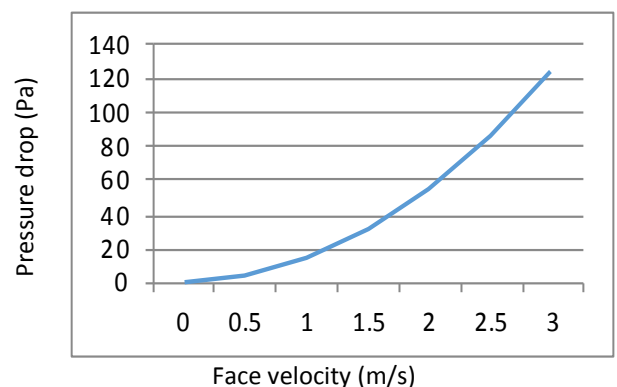

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : [www.ikonaluminium.com](http://www.ikonaluminium.com), Sales : [info@ikonaluminium.co.uk](mailto:info@ikonaluminium.co.uk)