


Ikon

IKL336 Structurally glazed



Typical detail

Product description

Blade Centre 34mm . Blade angle 60 degree.
 Visual free area 59%. Physical free area 43.5%.
 Frame depth 36.2mm
 Designed for integration into structurally glazed curtain wall frames. Toggle glazing blocks are custom designed to suit individual systems. Overall glazing thickness 28mm.

Tested to EN 13030:2002


BSRIA Test report 52719/1

Options

- Standard RAL or BS colours. Anodizing to special order.
- Drainage channel
- Insect mesh
- Bird mesh
- Single skin, or double skin insulated blanking panels with or without plenum box.

K factor	22.91	Ce	0.208
Watertightness	%	Class	Pressure Drop
Velocity	0.0	99.7	A
	0.5	99.4	A
	1.0	97.4	B
	1.5	81.4	C
	2.0	49.9	D
	2.5	32.4	D
			Face Velocity
			0.5
			1.0
			1.5
			2.0
			2.5
			3.0
			Pd
			3.43
			13.75
			30.93
			54.98
			85.91
			123.71

Performance: airflow, louvre with insect mesh

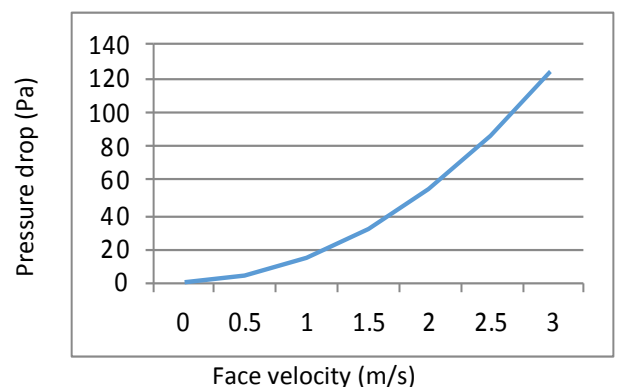

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk