


Ikon



IKL50 Demountable Louvre

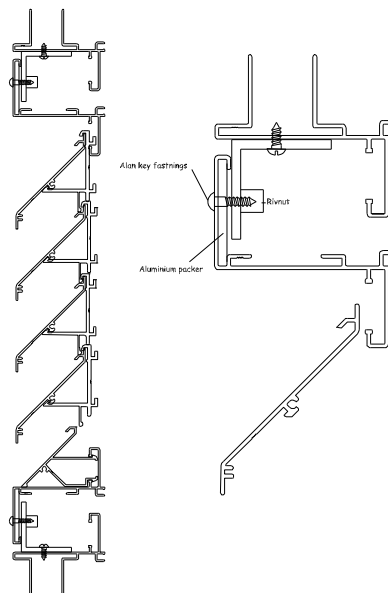

Product description


- Louvre panel demountable from outerframe
- Can be constructed from most of the IKL50 outerframes. Flange, glaze in or rebated.
- Blade Centre 50mm . Blade angle 45 degree.
- Visual free area 79%. Physical free area 50%.
- Louvre element tested to EN 13030:2002
- BSRIA Test report 54729/1

Results of testing of the louvre element only shown

Options

- Standard RAL or BS colours. Anodizing to special order.
- Drainage channel, insect mesh, bird mesh
- Single skin, or double skin insulated blanking panels.

K factor	14.23	Ce	0.265
Watertightness	%	Class	Pressure Drop Pd
Velocity 0.0	99.4	A	Face Velocity 0.5 2.13
0.5	98.8	B	1.0 8.54
1.0	97.0	B	1.5 19.21
1.5	92.3	C	2.0 34.15
2.0	86.8	C	2.5 53.36
2.5	76.1	D	3.0 76.84

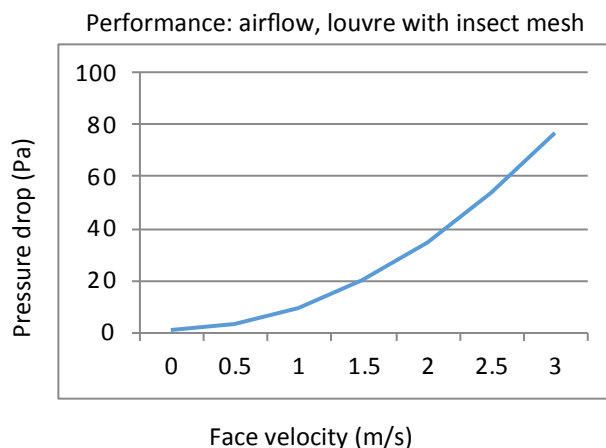

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk