


# Ikon



## IKL501 Flange frame louvre

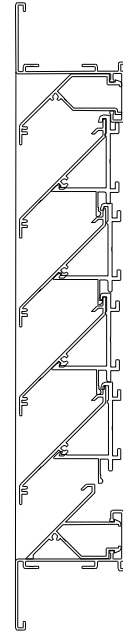

### Product description

Blade Centre 50mm . Blade angle 45 degree.

Visual free area 79%. Physical free area 50%.

Frame depth 64.2mm

33.5mm flange

Tested to EN 13030:2002

BSRIA Test report 54729/1

Can be supplied with fixing lugs if required

### Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel

Insect mesh

Bird mesh


Single skin, or double skin insulated blanking panels with or without plenum box.

K factor 14.23

Ce 0.265

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.4	A	Face Velocity 0.5	2.13
	0.5	B	1.0	8.54
	1.0	B	1.5	19.21
	1.5	C	2.0	34.15
	2.0	C	2.5	53.36
	2.5	D	3.0	76.84

Performance: airflow, louvre with insect mesh

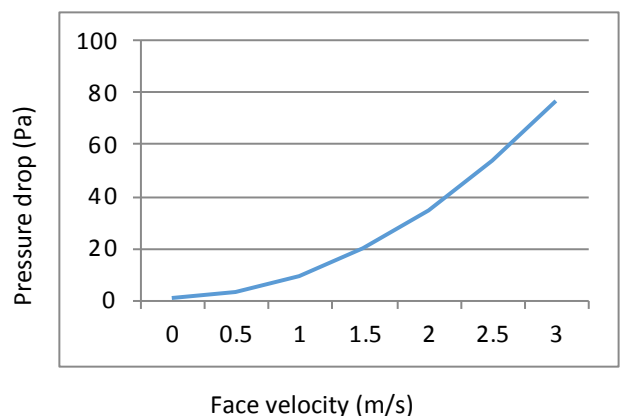

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : [www.ikonaluminium.com](http://www.ikonaluminium.com), Sales : [info@ikonaluminium.co.uk](mailto:info@ikonaluminium.co.uk)