


Ikon

IKL505 Custom louvre

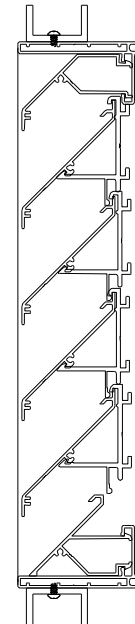

Typical detail


Product description

Blade Centre 50mm . Blade angle 45 degree.
 Visual free area 79%. Physical free area 50%.
 Frame depth 64.3mm
 Custom outerframe options utilizing channels, angles or pressings.
 Tested to EN 13030:2002
 BSRIA Test report 54729/1

K factor 14.23		Ce 0.265		
Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.4	A	Face Velocity 0.5	2.13
	0.5	B	1.0	8.54
	1.0	B	1.5	19.21
	1.5	C	2.0	34.15
	2.0	C	2.5	53.36
	2.5	D	3.0	76.84

Options

Standard RAL or BS colours. Anodizing to special order.
 Drainage channel
 Insect mesh
 Bird mesh
 Single skin, or double skin insulated blanking panels with or without plenum box.

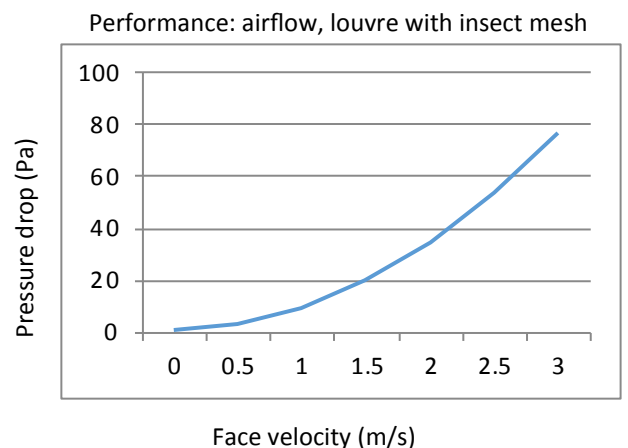

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905 ,Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk