


# Ikon

## IKL506 Structurally glazed



Typical detail

### Product description

Blade Centre 50mm . Blade angle 45 degree.

Visual free area 79%. Physical free area 50%.

Frame depth 64.3mm

Designed for integration into structurally glazed curtain wall frames. Toggle glazing blocks are custom designed to suit individual systems.

Tested to EN 13030:2002

BSRIA Test report 54729/1

### Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel

Insect mesh

Bird mesh


Single skin, or double skin insulated blanking panels with or without plenum box.

K factor 14.23

Ce 0.265

Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.4	A	Face Velocity 0.5	2.13
0.5	98.8	B	1.0	8.54
1.0	97.0	B	1.5	19.21
1.5	92.3	C	2.0	34.15
2.0	86.8	C	2.5	53.36
2.5	76.1	D	3.0	76.84

Performance: airflow, louvre with insect mesh

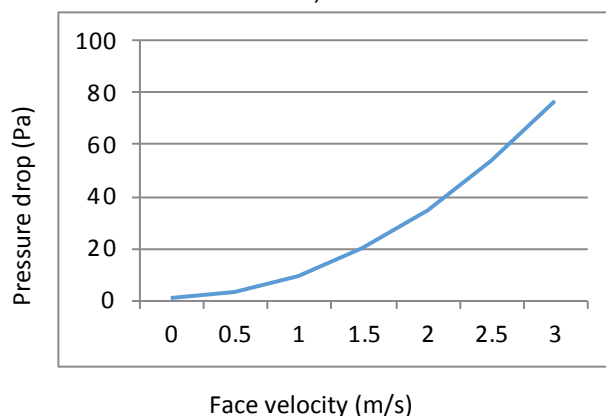

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : [www.ikonaluminium.com](http://www.ikonaluminium.com), Sales : [info@ikonaluminium.co.uk](mailto:info@ikonaluminium.co.uk)