


Ikon



IKL751 Flange frame louvre

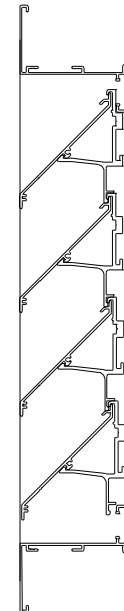

Product description


Blade Centre 75mm . Blade angle 45 degree.
 Visual free area 86%. Physical free area 57%.
 Frame depth 80.8mm
 43.2mm flange
 Tested to EN 13030:2002
 BSRIA Test report 56834/1
 Can be supplied with fixing lugs if required

K factor 19.04		Ce 0.232		
Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.8	A	Face Velocity 0.5	2.85
	0.5	A	1.0	11.42
	1.0	B	1.5	25.70
	1.5	C	2.0	45.70
	2.0	C	2.5	71.40
	2.5	D	3.0	102.82

Options

Standard RAL or BS colours. Anodizing to special order.
 Drainage channel
 Insect mesh
 Bird mesh
 Single skin, or double skin insulated blanking panels
 with or without plenum box.

Performance: airflow, louvre with insect mesh

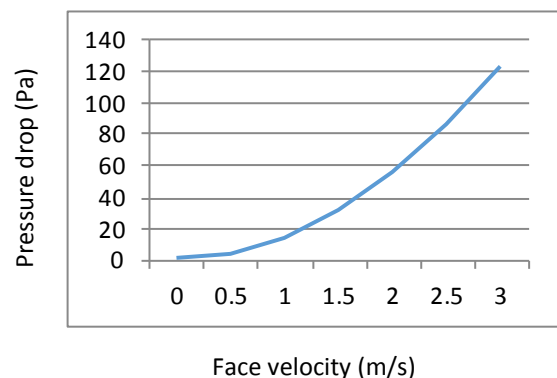

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk