


# Ikon

## Louvre backing panels

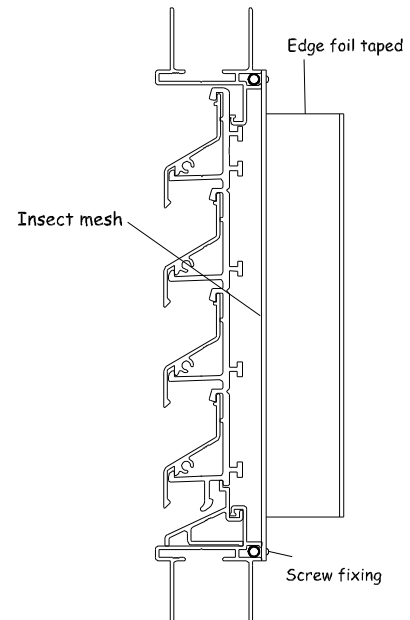

Typical demountable panel detail

### Product description

Constructed from 1.5mm aluminium sheet

Standard RAL or BS colours. Anodizing to special order.

### Options

Single skin blanking panels

Insulated sandwich panels comprising two skins of aluminium and Styrofoam insulation. Various thickness' of insulation are available to suit individual U value requirements. Phenolic foam may be incorporated to decrease the U value.

Tray panels comprising blanking panel to the louvre face and pressed metal inner fully concealing the insulation core.

Panels can be provided with cut outs or plenum box to the customers bespoke requirements.

### Fixing

Demountable panels are screwed to the louvers. This enables removing for the attachment of mechanical ventilation equipment.

Permanent panels are fixed to the louvres with rivets. If requested, these can be silicone sealed.