


Ikon

IKL75 louvre system

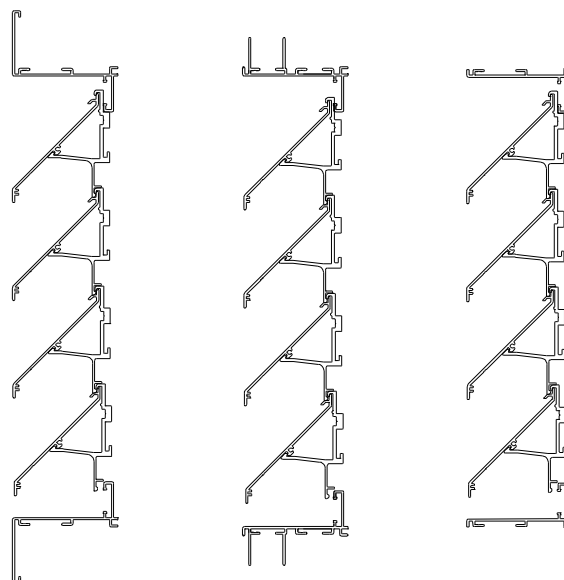

IKL751 Flange frame **IKL752** Glaze in **IKL753** Rebate

Product description

Blade Centre 75mm . Blade angle 45 degree.

Visual free area 86%. Physical free area 57%.

Frame depth 80.8mm

IKL751 Flange frame

IKL752 Glaze in frame. 28mm

IKL753 Rebate frame

Tested to EN 13030:2002

BSRIA Test report 56834/1

Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel

Insect mesh


Bird mesh

Single skin, or double skin insulated blanking panels

with or without plenum box.

K factor 19.04		Ce 0.232		
Watertightness	%	Class	Pressure Drop	Pd
Velocity 0.0	99.8	A	Face Velocity 0.5	2.85
	0.5	A	1.0	11.42
	1.0	B	1.5	25.70
	1.5	C	2.0	45.70
	2.0	C	2.5	71.40
	2.5	D	3.0	102.82

Performance: airflow, louvre with insect mesh

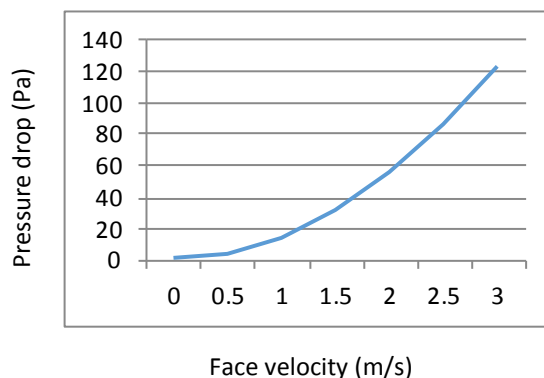

Unit 1 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk